

UNCLASSIFIED

Defense Technical Information Center
Compilation Part Notice

ADP011922

TITLE: Modeling of the Carrier Mobility at the Silicon Oxynitride-Silicon Interface

DISTRIBUTION: Approved for public release, distribution unlimited

This paper is part of the following report:

TITLE: International Conference on Solid State Crystals 2000: Growth, Characterization, and Applications of Single Crystals Held in Zakopane, Poland on 9-12 October 2000

To order the complete compilation report, use: ADA399287

The component part is provided here to allow users access to individually authored sections of proceedings, annals, symposia, etc. However, the component should be considered within the context of the overall compilation report and not as a stand-alone technical report.

The following component part numbers comprise the compilation report:
ADP011865 thru ADP011937

UNCLASSIFIED

Modeling of the carrier mobility at the silicon oxynitride-silicon interface

K.J. Pluciński

Military University of Technology, Warsaw, Poland

ABSTRACT

The main issue which is yet to be resolved in further developing the Surface Channel MOSFETs (SCMOSFETs) is understanding and eliminating deterioration of the carrier mobility at the insulator-semiconductor interface. The main factor causing this deterioration is hole and electron trapping-detrapping. One of the ways recently suggested of minimizing hole and electron trapping-detrapping at the Si-SiO₂ interface involves replacing the SiO₂ by silicon oxynitride (SiON). However degradation of MOSFETs, which have oxynitrides as gate dielectric, caused by trapping of hot electrons from the channel, is still found.

1. INTRODUCTION

The electrophysical parameters of the insulator-semiconductor interface are needed in order to determine the parameters of the transport carriers in the channel, and in particular the main parameters for models of MIS devices – carrier mobility in the inversion layer. The latter has been the subject of intensive investigation since the 1960s.

Two fundamental problems in this field are (a) developing the technology for measuring the structures, and (b) interpreting the results of these measurements.

- a) accuracy of modern methods for identifying mobility is largely dependent on accuracy in determining flat-band voltage U_{FB} . Accuracy in determining U_{FB} is, in turn, dependent on accuracy in determining such interface parameters as doping profile, the energy distribution of the traps and work function difference;
- b) up to now it was believed that effective carrier mobility must be modeled by taking into account Coulomb, phonon and roughness scattering of the insulator- semiconductor interface with the help of the Mathiesen' rule, according to which these mechanisms are independent.

However measurements show that electron and hole mobility in the inversion layer are dependent on charge concentration both in the inversion layer and in the depletion region, but do not depend on their combination, which is not in keeping with the Mathiesen rule.

The main reasons for this divergence are that the influence of the interface structure on carrier transport is not taken into account, and over-simplifications occur.

Two examples of the latter are:

- i) existing models of mobility are based in essence on a relaxation approximation of in the BTE;
- ii) quantum effects in the inversion equation are not taken into account in these models.

Both these approximations cease to apply in the channel sizes currently obtainable and in the case of large dependent concentrations at the surface.

Therefore among the fundamental problems which need to be resolved in order to develop a model for transport mobility in the SCMIS transistor channel are the following:

- i) the development of methods to solve BTE without any approximations;
- ii) identification of a doping profile at the interface with a level of efficiency enabling their implementation.

Mechanisms for carrier transport, in particular, for scattering and for generation-recombination are clearly dependent on the structure of the insulator – semiconductor interface.

The structure of this interface is determined in the first instance by the mechanisms for the formation of the isolation layer. As a result of recently research into these mechanisms, significant progress towards the construction of a physical and chemical model has been achieved. Agreement of several parameters of this model with the parameters of an electrophysical model, which were determined using the modified conductance method was found. This confirms the dsirability of carrying out further work in integrating both approaches (the physical – chemical and the electro-physical) in order to model this interface.

In the oxydation procedure one key process is the transportation of atoms and particles.

The oxynitrides have both advantages over SiO_2 (improved hot-electron immunity, higher charge to breakdown and suppressed boron diffusion) as well as shortcomings (degradation of MOSFETs with oxynitride as gate dielectric is still observed; considerably more interface states created for oxynitrides per injected hole than with SiO_2 , more vulnerable to hole bombardment). Classical electric methods of investigations of mobility related phenomena are restricted because the relatively low mobility of the trapping carriers limits electroconductivity¹⁻¹³. In order to assess the possible explanations both for these phenomena and for the nature of the defects, which have been proposed, a study of the electronic structure of a MOS system, using silicon oxynitrides as gate oxide, based on a first-principle molecular dynamic method, was carried out. A satisfactory explanation for the above-mentioned issues is crucial for constructing a model of carrier mobility.

We present a method which employs a band energy approach with molecular dynamic cluster optimization, the latter taking into account various structural modifications related to the non-stoichiometry of nanoclusters. We simulated the influence of chemical composition on the trapping properties of defects in silucon oxynitride. Clusters with different numbers of oxygen and nitrogen atoms in the second coordination sphere were considered.

By calculating the differences between the total energy of clusters in different charge states, we determined the energy gain for hole or electron trapping in the case of different types of defects, and the dependency of this gain on composition and cluster size. Thermal delocalization of the energy level of traps was calculated. On the basis of these results, we propose models for the trapping (localization) and detrapping (delocalization) of electrons on different kinds of defects in SiO_xN_y and Si_3N_4 . Mechanisms for creating different kind of defects, e.g. Linking two-fold coordinated nitrogen atoms with an unpaired electron, are proposed.

In order to determine the parameters of the oxynitride-Si system, non-linear optical methods, in particular photoinducing second harmonic generation (PISHG) were used.

2. ENERGY BAND STRUCTURE

The films were deposited by thermal low pressure chemical vapor deposition (LPCVD) on a silicon(111) substrate. The entire process was carried out using an ultra high vacuum chamber with pressure of about (4×10^{-8}) bar. The silicon(111) substrate is heated by radiation from a tungsten lamp. Such equipment enables acceleration of the evaporation process.

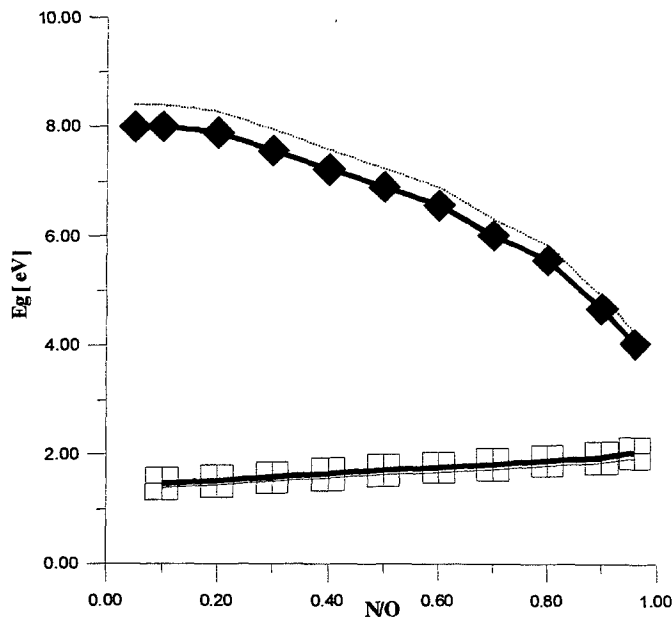


Fig. 1. Dependence of the energy gap E_g and refractive index n on the N/O ratio. \blacklozenge - E_g measured; \square - n measured.

High-purity gases (chlorosilane - SiH_2Cl_2 , ammonia - NH_3 , and nitrogen monoxide - N_2O), the contents of which can be controlled with precision up to 0.2%, are used as a source for this process. The N/O ratio is changed by continuously varying the $\text{N}_2\text{O}/\text{NH}_3$ source/gas ratio. The growth rate, which is dependent on the N/O ratio, is selected in accordance with the Habraken rule. On the basis of the calculations carried out, the dependence of the band energy structure on the parameters of the oxynitride-silicon (SiON-Si) system was calculated. In Fig. 1 the calculated dependence of the energy gap E_g and refractive index n on the N/O ratio is presented, as well as the corresponding results of measurements¹⁵. One can see that the band energy gap decreases with a decreasing of nitrogen content. Good agreement between the calculated and experimentally evaluated parameters validates the adopted model of simulation.

In Figure 2 calculated dependence of the energy gap on the N/O ratio and film thickness is presented¹⁶. One can see that both the N/O ratio, as well as the film thickness, form modulated-like dependencies.

These dependencies reflect, as it were, a kind of "competition" between long-range bulk-like crystalline ordering, two-dimensional intersurface disorder and electron-phonon near-the-surface non-centrosymmetry. Analysis showed that the dependencies on film thickness of both the top of the valence band (VB), as well as of the bottom of the conduction band (CB), are non-periodic. The dependence on film thickness was found to be entirely different for the VB and the CB. This reflects the different influence of electron-phonon anharmonicity on the models considered, and the role of electron-phonon interactions on long-range ordering

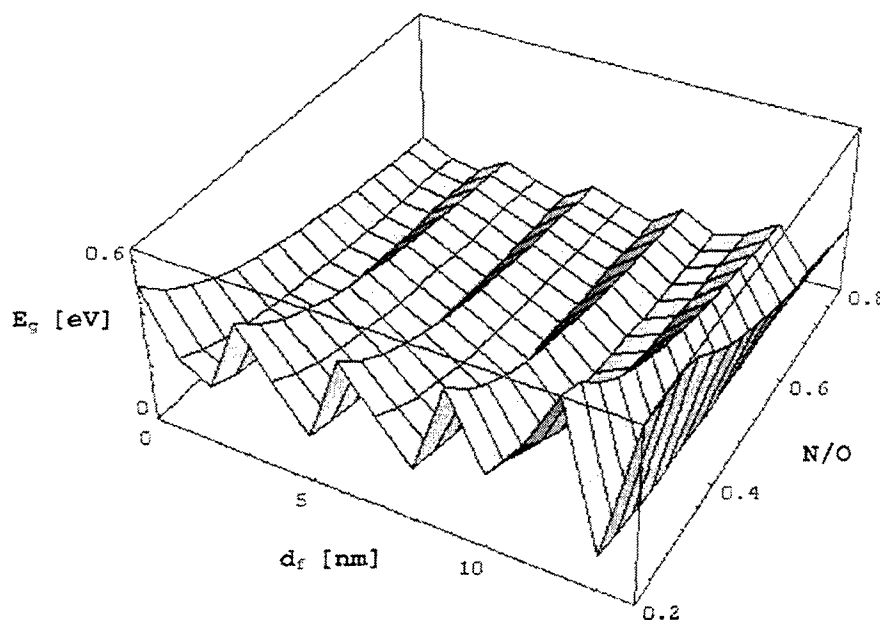


Fig. 2. Dependence of the band structure on N/O ratio and film thickness d_f .

3. GEOMETRY STRUCTURE

The results of molecular dynamic simulations of the O-Si and N-Si distances in relation to the N/O ratio and film thickness, carried out using the method described above are presented in Figure 3.¹⁶ It can be seen that an increase in film thickness leads to an increase in the oxygen-silicon distance of between 0.16 and 0.28 nm. For an N/O ratio of approximately 0.015, the oxygen-silicon distance achieves its maximum at a thickness of about 28 nm. A further increase in the N/O ratio leads to a shift of the observed maximum positions towards the lower thickness (up to 16.5 nm for an N/O of about 1.0). The existence of maxima would also seem to reflect a kind of 'competition' between long-range ordering of the silicon crystalline surface, and random amorphous-like disordering due to the substitution of the nitrogen and oxygen in the silicon

positions. Oxygen and nitrogen cause opposite changes in the charge density distribution, and, therefore, in the interface electrostatic potential distribution near the oxynitride-silicon<111> (SiON-Si < 111>) interface. The dependence on film thickness for the nitrogen-silicon (N-Si) distances is significantly different from that for oxygen-silicon (O-Si) distances. In the first place, one can see in Figure 8 two thickness maxima. The first has a value of about 0.21 nm for a film thickness range of 10-16 nm, the second of about 0.28 nm within the thickness range 18 nm-24 nm. The appearance of the two maxima suggests the existence of two possible minima of the local cluster total energy for the nitrogen-silicon (N-Si) distances, in contrast to the oxygen-silicon (O-Si) distances.

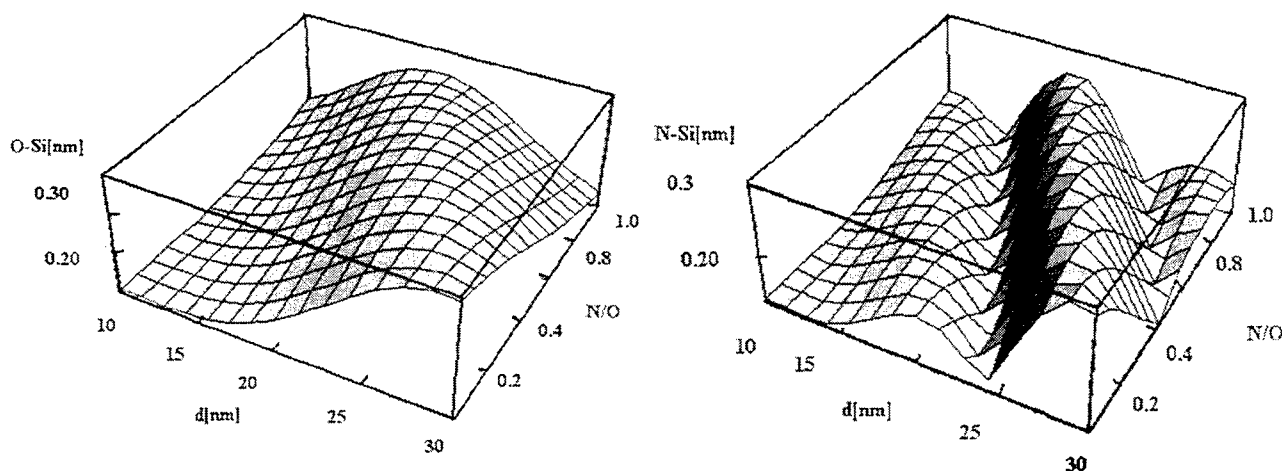


Fig. 3. Molecular dynamics geometry optimization of the O-Si and N-Si distances versus the film thickness d and the N/O ratio.

4. CONCLUSIONS

Nitridation leads to an increase in concentration of interface states and $1/f$ noise. This is seen particularly in the case of nitridation in NH_3 where trapping centers are introduced through the hydrogen, and with oxides formed in an N_2O atmosphere, due to deterioration in the structure of the interface layer as a result of an initial increase in the speed of formation. A significant decrease in carrier mobility for lower strengths of the electric field has also been found in MOS transistors with an n channel as a result of nitrogen implantation before oxydation. On the other hand, no increase in carrier mobility was observed for higher electric fields. However where formation occurred in an N_2O atmosphere, there was no significant decrease in mobility for lower strengths of the fields, while there was a detectable increase in mobility for higher fields. In the case of SiON layers formed through a PECVD (plasma enhanced chemical vapor deposition) procedure, a significant decrease in mobility for lower strengths and a detectable increase for higher strengths have been established, together with lower hot-hole immunity, in comparison with SiO_2 of the interface SiON-Si layer.

In the carrying out the present work I found a number of discrepancies in the explanation for the above-mentioned specific observations regarding the influence of nitrogen on the properties of the SiON-Si system. These discrepancies make it practically impossible to give a uniform description of carrier transport in transistor channels with SiON gate isolation. A model of the influence of nitrogen on the properties of M-SiON-Si structures, based on an investigation both of the energy structure, as well as of the geometry structure, of the SiON-Si interface region is needed. In order to determine the influence of nitrogen on the properties of the SiON layers and on the properties of the interface SiON-Si layers, the ratio of the nitrogen concentration to that of oxygen (N/O) must be established, together with influence of nitrogen atoms on the geometry structure (for example, the distances N-Si and O-Si) and the energy structure of both the SiON, as well as the interface SiON-Si layer.

ACKNOWLEDGEMENTS

The study was supported by the Polish State Committee for Scientific Research through grant No KBN-8-T11B 026 14.

REFERENCES

1. Avid Kamgar, J.T. Clemens, A. Ghetti, C.T. Liu and E.J. Lloyd, "Reduced Electron Mobility due to Nitrogen Implant Prior to the Gate Oxide Growth", *IEEE El. Dev. Lett.*, v.21, No. 5, pp. 227-229, 2000.
2. Hnyang Yang, Hiro Niimi, Jeff W. Keister, Gerald Lucovsky, and Jack E. Rowe, "The effects of Interfacial Sub-Oxide Transition Regions and Monolayer Level Nitridation on Tunneling Currents in Silicon Devices", *IEEE El. Dev. Lett.*, v.21, No. 2, pp. 76-78, 2000.
3. H. Niimi and G. Lucovsky, "Monolayer - level controlled incorporation of nitrogen in ultra-thin gate dielectrics using remote plasma processing: formation of stacked 'N-O-N' gate dielectrics", *J. Vac. Sci. Technol. B*, v. 17, pp. 1250-1257, 1999.
4. F. J. Guarin, Stewart E. Rauch, Giuseppe La Rosa, and Kevin Bresford, "Improvement in Hot Carrier Lifetime as a Function of N₂ Ion Implantation Before Gate Oxide Growth in Deep Submicron NMOS Devices", *IEEE El. Dev. Lett.*, v.20, No. 12, pp. 602-604, 1999.
5. M.F. Li, Y.D. He, S.G. Ma, B.J. Cho, K.F. Lo, and M.Z. Xu, "Role of Hole Fluence in Gate Oxide Breakdown", *IEEE El. Dev. Lett.*, v.20, No. 11, pp. 586-588, 1999.
6. Wen-Chin Lee, Tsu-Jae King, Chenming Hu, "Observation of Reduced Boron Penetration and Gate Depletion for Poly-Si_{0.8}Ge_{0.2} Gated PMOS Devices", *IEEE El. Dev. Lett.*, v.20, No. 1, pp. 9-11, 1999.
7. Jin-Woo Lee, Nae-In Lee, and Chul-Hi Han, "Stability of Short-Channel Polysilicon Thin-Film Transistors with ECR N₂O-Plasma Gate Oxide", *IEEE El. Dev. Lett.*, v.20, No. 1, pp. 12-14, 1999.
8. Nae-In Lee, Jin-Woo Lee, Hyong-Sub Kim, and Chul-Hi Han, "High-Performance EEPROM's Using N- and P-channel Polysilicon Thin-Film Transistors with Electron Cyclotron Resonance N₂O-Plasma Oxide", *IEEE El. Dev. Lett.*, v.20, No. 1, pp. 15-17, 1999.
9. Mukesh Khare, X.W. Wang, T.P. Ma, "Transconductance in Nitride-Gate or Oxynitride-Gate Transistors", *IEEE El. Dev. Lett.*, v.20, No. 1, pp. 57-59, 1999.
10. P. Masson, Jean-Luc Autran, J. Brini, "On the Tunneling Component of Charge Pumping Current in Ultrathin Gate Oxide MOSFET's", *IEEE El. Dev. Lett.*, v.20, No. 2, pp. 92-94, 1999.
11. Y. Wu and G. Lucovsky, "Ultrathin Nitride/Oxide (N/O) Gate Dielectric for p⁺-Polysilicon Gated PMOSFET's Prepared by a Combined Remote Plasma Enhanced CVD/Thermal Oxidation Process", *IEEE El. Dev. Lett.*, v.19, No. 10, pp. 367-369, 1998.
12. Y. Shi, X. Wang, and T.P. Ma, "Tunneling Leakage Current in Ultrathin (<4 nm) Nitride/Oxide Stack Dielectrics", *IEEE El. Dev. Lett.*, v.19, No. 10, pp. 388-390, 1998.
13. P.T. Lai, Jing-Ping Xu, and Y.C. Cheng, "Improvement on 1/f Noise Properties of Nitrided n-MOSFET's by Backsurface Argon Bombardment", *IEEE El. Dev. Lett.*, v.20, No. 4, pp. 149-151, 1999.
14. Y. Okada and P.J. Tobin, "Hot-Carrier Degradation of LDD MOSFET's with Gate Oxynitride Grown in N₂O", *IEEE El. Dev. Lett.*, v.15, No. 7, pp. 233-235, 1994.
15. K.J. Pluciński, I.V. Kityk, "Elliptically - polarized light - induced second harmonic generation in SiN_xO_y", *Journal of Non-Crystalline Solids*, v. 26, pp. 143-154, 2000.
16. K.J. Pluciński, I.V. Kityk, M. Makowska-Janusik, A. Mefleh, H. Kaddouri, and S. Benet, "Photoinduced Optical Second Harmonic Generation of SiNO Films Deposited on Si<111> Substrate", *Journal of Applied Physics*, v. 87, N 8